

Single Digital Signage(43"/49"/55")

1st January 2019

Model	NT-APAD4318A	NT-APAD4917A	NT-APAD5517A
Panel Specifications			
Panel Type	43"DLED	49"DLED	55"DLED
Resolution	1920 x R.G.B x 1080	1920 x R.G.B x 1080	1920 x R.G.B x 1080
Active Area	946.2mm(H) x 534.4mm(V)	1077.8mm(H) x 608mm(V)	1216.8mm(H) x 687.1mm(V)
Display Scale	16:9	16:9	16:9
Brightness	330cd/m ²	450cd/m ²	450cd/m ²
Viewing Angle	H:178°,V:178°	H:178°,V:178°	H:178°,V:178°
Pixel Pitch	0.4902 (H) x 0.4902 (V)	0.5593 (H) x 0.5593 (V)	0.63 (H) x 0.63 (V)
Hardware Information			
CPU Frame	Octa-Core Cortex TM-A7 CPU(8 Core Processors)		
	Low-power CoolFlex TM Power Management architecture		
GPU	PowerVR SGX544 GPU		
	Support OpenGL ES2.0/1.1, OpenCL 1.1, DX9_3		
Memory	Supports 32-bit DDR3/DDR3L/LPDDR3/LPDDR2		
	Supports SLC/MLC/TLC/EF NAND with 64-bit ECC		
	Supports eMMC		
Video	Supports 1080p@60fps video playback		
	Supports multi-format video playback, including H.264 BP/MP/HP, H.265/HEVC MP/L5.2, VP8/VP9, MPEG1/2, MPEG4 SP/ASP GMC, H.263 including Sorenson Spark, WMV9/VC-1,		
	Supports H.264 1080@60fps or 720@120fps video encoding		
ROM (Flash)	8G	8G	8G
RAM(DDR3)	1G	1G	1G
AC Switch	YES	YES	YES
WIFI	YES	YES	YES
USB	YES	YES	YES
SD card	YES	YES	YES
Input Interface			
HDMI	1	1	1
RJ45	1	1	1
USB	2	2	2
SD card	1	1	1
External Power Source	1	1	1
Struction Information			
Size before Packing(L*H*W)	969.6 x 564.2 x 73.5 (mm)	1102.2 x 638.9 x 80.6 (mm)	1243.2 x 719.7 x 81.1 (mm)
Size in Carton(L*H*W)	1080.5 x 150 x 667 (mm)	1210 x 175 x 744 (mm)	1355 x 175 x 824 (mm)
Net Weight	8.1kg	9.9kg	13.6kg
Gross Weight	10.1kg	13.4kg	18kg
Wall Hanging	200*300 (mm)	200*300 (mm)	200*300 (mm)
Power Management&Safety&Certificate			
Power Input	100-240VAc	100-240VAc	100-240VAc
Power Consuption	75W	110W	130W
Standby Power	≤0.5W	≤0.5W	≤0.5W
Voltage Range	100-220V~ 60/50HZ	100-220V~ 60/50HZ	100-220V~ 60/50HZ
Certificate	CE	CE	CE
General Characteristics			
Publish Control Remotely	YES	YES	YES
Multi-timing on & off	YES	YES	YES
Environment			
Working Temprature	5℃ ~ 40℃	5℃ ~ 40℃	5℃ ~ 40℃
Working Humidity	10% ~ 85%	10% ~ 85%	10% ~ 85%
Storage Temperature	-20℃-55℃	-20℃-55℃	-20℃-55℃
Working Humidity	5℃-95℃	5℃-95℃	5℃-95℃
Accessory			
Breathing Lamp	1PCS	1PCS	1PCS
Remote control	1PCS	1PCS	1PCS
Instructions	1PCS	1PCS	1PCS
Warranty card	1PCS	1PCS	1PCS

Main Function of the Digital Signagelink Platform

1st January 2019

Home	Visiting common menu faster for efficient operations Showing basic information of the status of all the players and contents
Content	Creating, editing and publishing programs to different players in different shops Content supports with rolling words,video, Image, weather,webpage, doc.etc Managing any signage in anytime, anywhere
Player	Monitoring the information of players and see what programs are playing in any digital signages. Urgent subtitles, publish information or programs at any time. Multi schedule and giving information to the screen, such as current weather
Admin	Creating new user account, granting permission, authorization management System can be fully backed up, for system recovery
Event Log	Records of the programs published Checking whether Terminal Android system received the order from server or not
Resource	Maintaining video, image, music, Template and PDF files Maintaining predefined templates and user templates

Digital Signage

Remaining license for android:0 Remaining license for windows:2 [Import License](#)

Server State: Offline Welcome: [Administrator](#)

[Home](#)
[Content](#)
[Player](#)
[Admin](#)
[Event Log](#)
[Resource](#)

New Content

Publish

Player Information

Player Monitoring

User

Resource

Operation Log

Play Schema

Basic Info

› Players: [3](#)

› Contents: [32](#)

New Content

› [Entrance-3in1](#)


› [Spring-festival](#)

› [Christmas-toys](#)


To Be Reviewed

› [PB00000048](#)

DIMENSION for SINGLE 43"

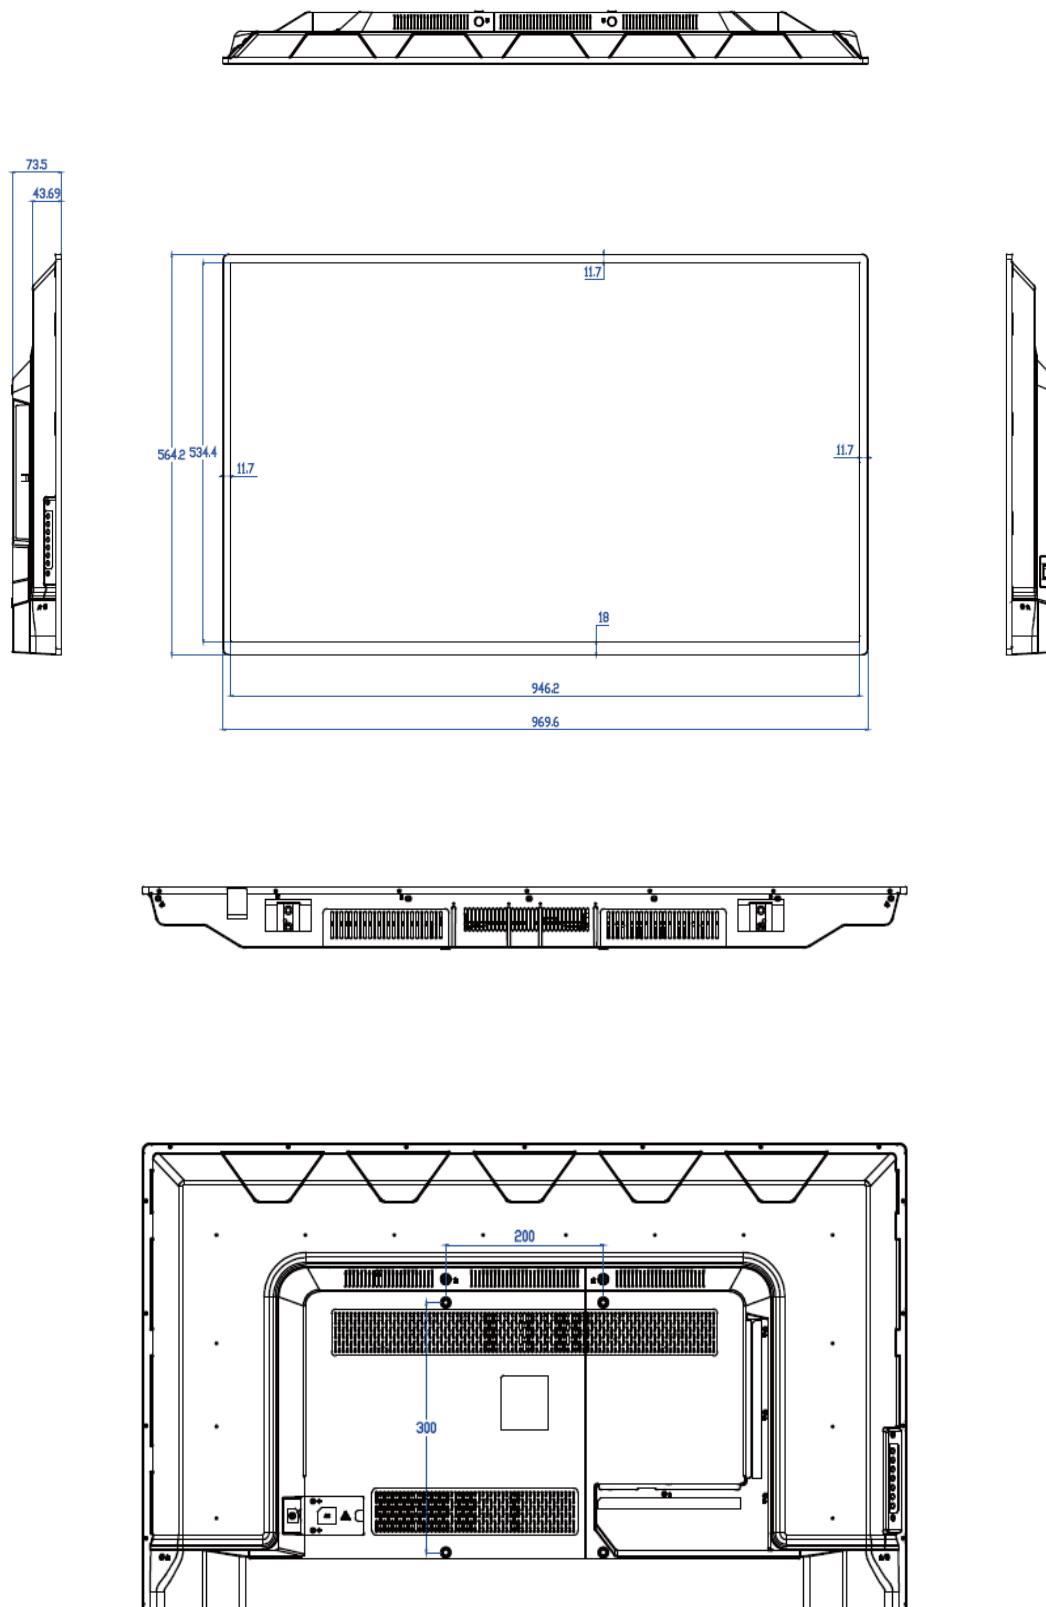

DIMENSION for SINGLE 49"

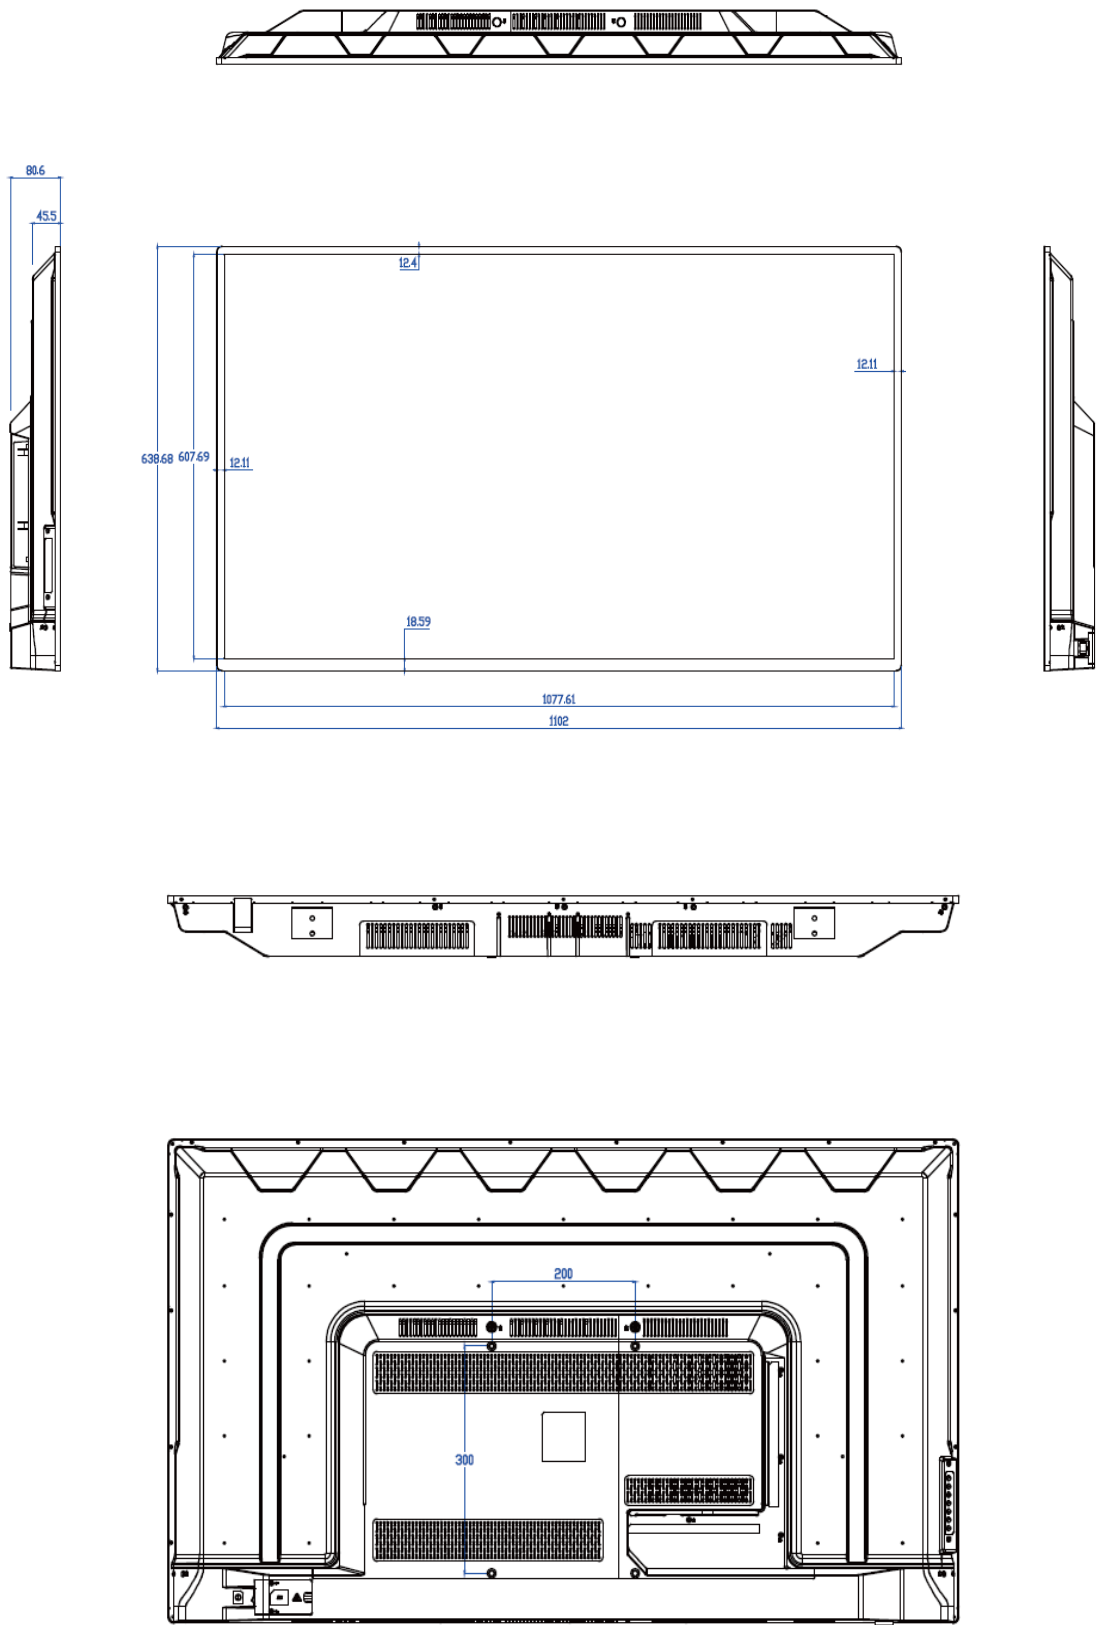

DIMENSION for SINGLE 55"

